

FLASHLIGHTS & LASERS

IDENTIFY WITH CERTAINTY.

It is critical to positively identify your target and what is behind it and within the immediate area. Assess and proceed accordingly with mounted and handheld solutions or ideally both for the most uncertain of times and situations. Two is one and one is none.



JUMP TO A SERIES

HANDHELD LIGHTS 154

- Everyday Carry Flashlight
- VANQUISH 700 Flashlight

WEAPON LIGHTS 155

- Sub-compact Pistol Light
- Compact Pistol Light
- Quick Detach Grip Light
- Polymer Grip Light

LASERS 156

- BULLDOT® Compact Green Laser
- Compact Green Pistol Laser
- Compact Red Laser
- Sub-compact Red Laser

FLASHLIGHT & LASER ACCESSORIES 157

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)



HANDHELD LIGHTS


EVERYDAY CARRY FLASHLIGHT

- » Multi-functional Flood Focus: 400 Lumen and 20 Lumen High and Low Output with High Output Emergency SOS and Strobe
- » Momentary/Constant On/Off Push Button Tail Cap
- » Matte Black Anodized Aluminum Construction
- » Reversible Steel Pocket Clip for Bezel Head Up or Down Carry
- » IPX7 Waterproof Rated

■ / **LT-ELEDC01**



	LT-ELEDC01
Mount Type	Handheld / Pocket Clip
Lumen Output	High - 400 Lumen Low - 20 Lumen
Dimensions	4.72" x 1.10" (120 mm x 28 mm)
Weight (w/Battery)	4.3 oz (121.9 g)
Bulb Type	20 mm LED IRB
Focus	Preset Flood
Battery	CR123A x 2 (Also compatible with 18650 rechargeable battery)
Battery Life	High - 50 mins Low - 24 hrs


VANQUISH 700 FLASHLIGHT

- » Multi-functional Hybrid Focus: 700 Lumen and 20 Lumen High and Low Output with High Output Emergency Strobe
- » Force Multiplier Serrated Bezel Head
- » Momentary/Constant On/Off Push Button Tail Cap
- » Removable Grip Retention Insert and Spacer, Offset Picatinny Ring Mount, and Pressure Switch Included
- » Supports CR123A and Rechargeable 18650 Batteries
- » IPX7 Waterproof Rated
- » Matte Black Anodized Aluminum Construction

■ / **LT-EL700**

	LT-EL700
Mount Type	Handheld / Picatinny
Lumen Output	High - 700 Lumen Low - 20 Lumen
Dimensions	6.7" x 1.81" (170 mm x 46 mm)
Weight (w/Battery)	8.2 oz (233.9 g)
Bulb Type	37 mm LED IRB
Focus	Hybrid Beam with Large Spill Area & Intense Long Range Hotspot
Battery	CR123A x 2 (Also compatible with 18650 rechargeable battery)
Battery Life	High - 3 hrs Low - 24 hrs

WEAPON LIGHTS


SUB-COMPACT PISTOL LIGHT

- » Fits Flush on Most Compact Pistols
- » Ambidextrous Momentary/Constant On/Off Switches
- » Flood Focus 200 Lumen Beam
- » Matte Black Anodized Aluminum Construction
- » IPX7 Waterproof Rated

■ / **LT-ELP120R**


COMPACT PISTOL LIGHT

- » Ambidextrous Momentary/Constant On/Off Switches
- » Removable Positional Inserts Increase Pistol Rail Compatibility
- » Flood Focus 400 Lumen Beam
- » Matte Black Anodized Aluminum Construction

■ / **LT-ELP123R-A**


QUICK DETACH GRIP LIGHT

- » Momentary Constant On/Off Push Button
- » Flood Focus 400 Lumen Beam
- » Matte black Anodized Aluminum Construction
- » Picatinny Quick Detach Lever Lock Mount
- » US PAT. 8397421

■ / **MNT-EL2286PQ-A**


POLYMER GRIP LIGHT


- » Momentary/Constant On/Off Push Button
- » Left and Right Side Toggled Momentary Only Strobe
- » Flood Focus 400 Lumen Beam, Scalable in Constant-on from 400 to 20 Lumen
- » IPX7 Waterproof Rated
- » Impact Resistant Polymer Construction
- » US PAT. D876572

■ / **MT-EL2236X**

	LT-ELP120R	LT-ELP123R-A	MNT-EL2286PQ-A	MT-EL2236X
Mount Type	Picatinny	Picatinny	Picatinny QD Lever Lock	Picatinny
Lumen Output	200 Lumen	400 Lumen	400 Lumen	High-400 Lumen Low-20 Lumen
Dimensions	2.98" x 1.12" x 1.13" (75.8 mm x 28.5 mm x 28.7 mm)	3.11" x 1.31" x 1.50" (79 mm x 33.3 mm x 38 mm)	2.80" x 1.77" x 5.34" (71 mm x 45.8 mm x 135.7 mm)	2.13" x 1.38" x 4.09" (54.1 mm x 35.1 mm x 103.9 mm)
Weight (w/Battery)	2.6 oz (73 g)	3.5 oz (100.2 g)	12 oz (340.2 g)	6.6 oz (187.1 g)
Bulb Type	20 mm LED IRB	24 mm LED IRB	26 mm LED IRB	23 mm LED IRB
Focus	Preset Flood	Preset Flood	Wide Angled Flood	Wide Angled Flood
Battery	CR2 x 1	CR2 x 1	CR123A x 2	CR123A x 2
Battery Life	1 hr	1 hr	3 hrs	High - 3 hrs Low - 24 hrs



LASERS

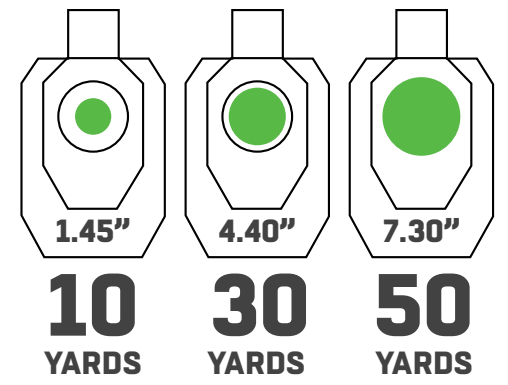

BULLDOT® COMPACT GREEN LASER

- » Expanding Beam Diameter Increases from 1" up to 8" at 50 Yards for the Eyes to Pick up Faster at Farther Distances
- » Matte Black Anodized Aluminum Construction
- » Constant On/Off Push Button Tail Cap and Pressure Switch Included

■ / SCP-LS289S

	SCP-LS289S
Mount Type	Low Profile Picatinny Mount
Laser Range	328.1 yds (300 m)
Beam Diameter	1.3" (32 mm) @ 10 yds (9.1 m) 3.8" (96 mm) @ 30 yds (27.4 m) 8" (203 mm) @ 50 yds (45.7 m)
Dimensions	3.37" x 1.89" x 1.34" (85.5 mm x 48 mm x 34 mm)
Weight with Battery	5.2 oz (133 g)
Battery	CR2 x 1



COMPACT GREEN PISTOL LASER

- » Fits Flush on Most Compact Pistols
- » Class 3R Bright Green Laser
- » Ambidextrous Momentary/Constant On/Off Switches
- » Matte Black Anodized Aluminum Construction
- » Low Profile Picatinny Mount and Side Plate

■ / SCP-LS279S-A




COMPACT RED LASER

- » Precise Windage / Elevation Adjustment
- » Powerful Long Range Beam with Pinpoint Accuracy
- » Pressure Switch Included
- » Slide-on Picatinny Ring Mount included

■ / SCP-LS268

	SCP-LS279S-A	SCP-LS200	SCP-LS268
Mount Type	Low Profile Picatinny Mount	Low Profile Picatinny Mount	Slide-on Picatinny Ring Mount
Laser Range	546.8 yds (500 m)	546.8 yds (500 m)	546.8 yds (500 m)
Beam Diameter	1.1" (28 mm) @ 16.4 yds (15 m)	1.1" (28 mm) @ 16.4 yds (15 m)	0.6" (16 mm) @ 16.4 yds (15m)
Dimensions	2.38" x 1.18" x 1.15" (60.4 mm x 30 mm x 29.3 mm)	1.19" x 1.27" x 1.28" (30.2 mm x 32.2 mm x 32.5 mm)	2.59" x 0.79" (65.8 mm x 20 mm)
Weight with Battery	2.1 oz (61 g)	1.3 oz (36 g)	1.1 oz (30g)
Battery	1/3N x 1	LR48 (AG5) x 4	LR44 x 4

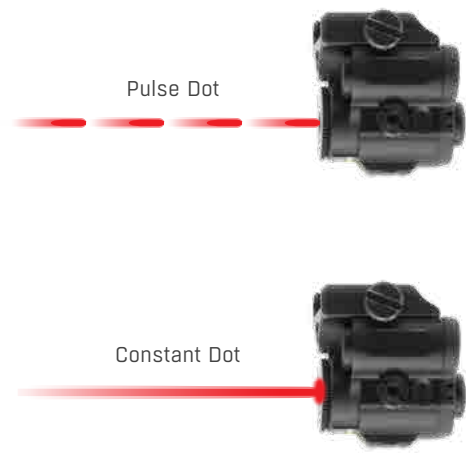

SUB-COMPACT RED LASER

- » Class 3R Bright Red Laser
- » Programmable for Constant or Pulse Dot Beam Operation
- » Matte Black Anodized Aluminum Construction
- » Sub-compact 1.19" Length
- » Low Profile Picatinny Mount and Side Plate

■ / SCP-LS200

OPTIONAL ACCESSORIES

PICATINNY OFFSET RING MOUNT

- » Compatible with 27mm, 25.4mm (1"), and 20mm Flashlight Body Diameters with Use of Included Inserts
- » Matte Black Anodized Aluminum Construction

■ / RG-FL138



M-LOK® / KEYMOD OFFSET RING MOUNTS

- » Snag-free Melted Contours and Dehorned Corners
- » Matte Black Anodized Aluminum Construction
- » Compatible with 27mm, 25.4mm (1"), and 20mm Body Diameters with Use of Included Inserts

■ / RG-FL27MC
■ / RG-FL27KC



	RG-FL138	RG-FL27MC	RG-FL27KC
Ring Diameter	Adaptable with Inserts		
No Insert (27 mm)	No Insert		
Insert 2 (25.4 mm)			
Compatible Model	LT-ELEDC01, LT-EL700		
Insert 1 + Insert 2 (20 mm)			